

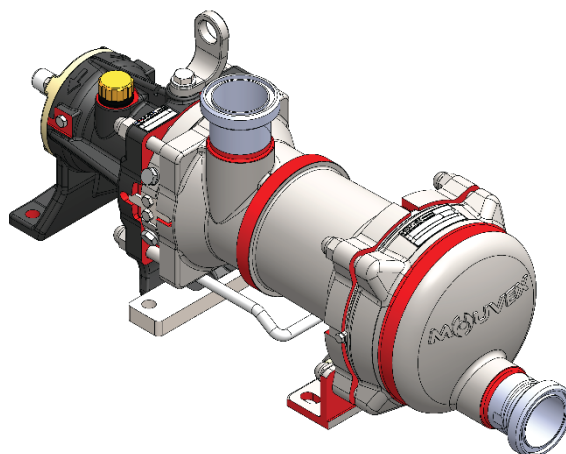


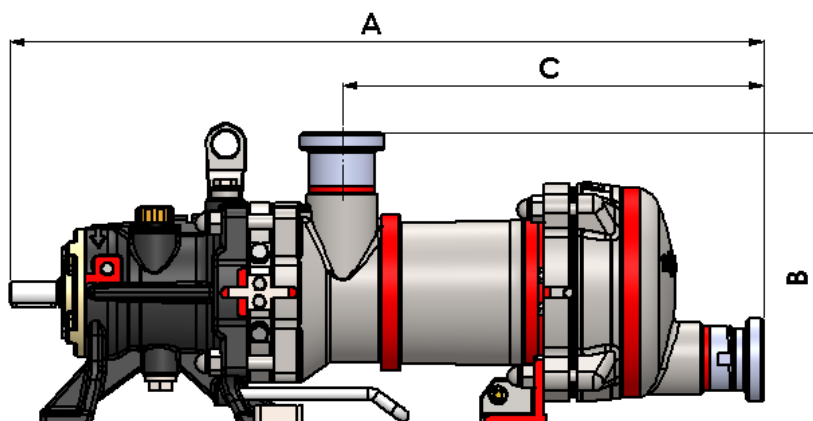

CHARACTERISTICS

		STANDARD	AVAILABLE OPTIONS
Technology		Eccentric Disc Mouvex®	
Maximum Flow rate m³/h (GPM)		H-Flo 6: 6,5 (28,6) H-Flo 8: 8,5 (37,4)	
Displacement per revolution (l / gal US)		H-Flo 6: 0,111 (0,029) H-Flo 8: 0,148 (0,039)	
Inlet chamber volume L (gal US)		1,5 (0,4)	
Outlet chamber volume L (gal US)		0,95 (0,25)	
Weight kg (lbs)		41 (91)	
Wet surface m² (in²)		0,42 (4,52)	
Moment of inertia kg.mm²		4 503	
Ports		DN50 SMS 1145	DN50 DIN11851 DN50 DIN11864-2 BF-A Aseptik 2" CLAMP ASME BPE-2009 DN50 CLAMP (ISO 2852)
Pump heating		None	Heating Jacket
Easy Clean System		None	ECS
Dimensions mm (in.) (with SMS connections)	A	625 (24,6)	
	B	240 (9,45)	
	C	348 (13,7)	
	D	182 (7,17)	
	E	202 (7,95)	

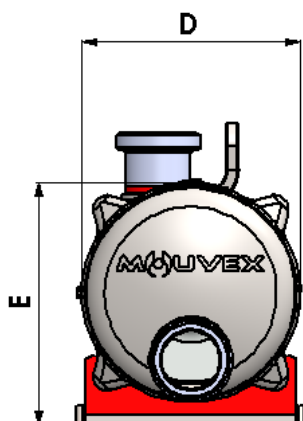

OPERATING LIMITS

Minimum temperature °C (°F)	-15 (5)
Maximum temperature °C (°F)	Process: 100 (212) Washing/Rinsing/Sterilisation:121 (250)
Maximum dynamic in-pump viscosity cP	10 000
Maximum differential pressure bar (psi)	H-Flo 6 : 10 (145) - H-Flo 8 : 7 (101)
Maximum inlet pressure barg (psig)	Process : 2 (29) Washing / Rinsing / Sterilisation : 3 (43.5) Pump stopped : 6 (87)
Maximum speed rpm	1000
Maximum solid particle size mm (in)	2 (0,079)
Maximum soft particle size mm (in)	8 (0,315)

MATERIALS OF CONSTRUCTION

Part No	PART NAME	STANDARD MATERIALS	AVAILABLE OPTIONS
39100	Inlet Chamber	316L Stainless Steel	
39108	Inlet chamber Bracket	316L Stainless Steel	
39201	Cylinder	316L Stainless Steel	
39301	Disc	CY5SnBiM (anti galling alloy)	
39304	Disc Nut	316L Stainless Steel	
39401	Outlet Cover	316L Stainless Steel	
39596	Transmission Assembly		
	Bearings	Ball / Roller / Needle	
	Double layers Bellow Assembly	316Ti & 316 L Stainless Fabrication	
	Housing	Ductile iron + e coating	
	Transmission Lubricant	Synthetic oil	
39206	O-Rings (EC 1935/2004 & FDA)	EPDM	FKM FKM coated FEP

